




The Ledger #5 was modified to sheet better, 20-40 gpm are recommended. there is a drain down feature so there should not be standing water if installed correctly.



Concrete pad for waterfall should be about 6 ft wide and 24 inches from front to back.

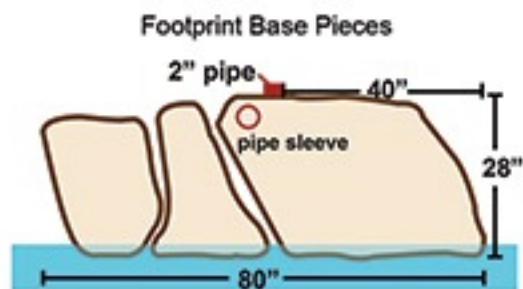

Total kit weighs 600 lbs, heaviest piece 150 lbs. Includes 2" plumbing snorkel not shown here.



Base piece #2 can be reversed or cut as needed for radius applications.



Mortar base pieces to a concrete foundation and mortar between castings and layers.



A thick mortar joint is needed for strength. When setting #5 align plumbing columns.



2" plumbing snorkel (provided) goes into column and exits at the back. Hide plumbing with hollow rock #6.