



Kit comes palletized on a 7 ft skid. 5 cast rock pieces, weight 1,200 lbs



7 small cast pieces, 2" pvc for plumbing column and hollow rocks to hide pipes as shown below are included in kit. Three color options.





The cap rock #5 was placed on the boulder to the right in this install.

Wedge piece is shown between left boulder and center base piece, not used in a radius application. The 3 large boulders and the ledger piece can be moved around as needed.



6" plumbing sleeve for 2" pipe should be filled with spray foam or mortar after pipe is set

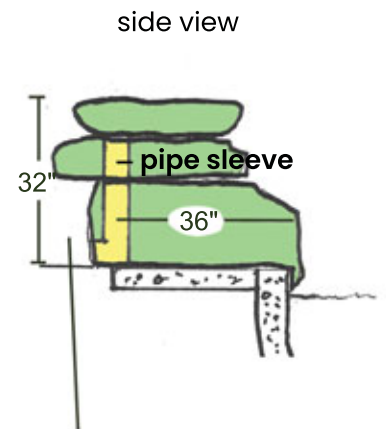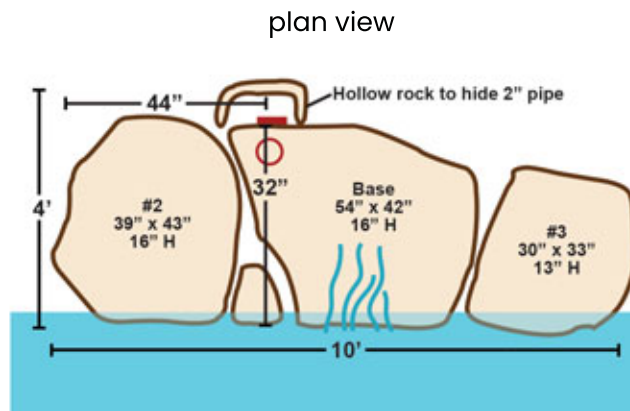

use hollow rock to hide plumbing in back



The heaviest piece is about 200 lbs. For pool installations it is recommended that all cast pieces be mortared to a concrete deck and mortared together. Small pieces can be secured with construction adhesive.

