

## Florida Three Step Waterfall

A simple waterfall for a pond, pool or pond less feature. Can be installed with mortar like our Modular Waterfalls or with Construction Adhesive as shown here.



Florida Three Step Waterfall, 5ft 4" wide, 30" deep, 24" high



Kit includes 5 cast rock pieces and a pvc pipe for plumbing. Total weight: 500 lbs.



1. To start: dry set base pieces and mark with chalk or pencil. Base piece #1 should be level.



2. Wedge pieces are available to use as shims to make base piece level if deck slopes too much.




3. Secure base pieces with mortar or construction adhesive to a concrete base.



4. Set base #1 first and then the side boulder #2 because the upper pieces fit against the boulder.



5. There are channels in all 3 levels for light cords. The channels slope forward to prevent water seepage.

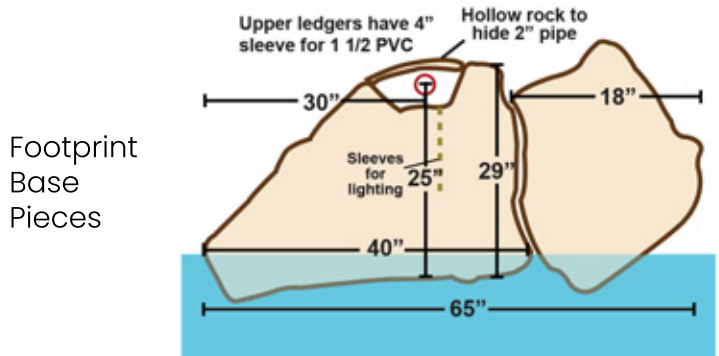

Footprint Base Pieces



6. If you started level you should still be level, front to back is not as critical but side to side level allows even water flow.



7. After setting #3 & 4 install the pvc pipe snorkel provided. The pipe from the pump can be connected now or later. We use 1 1/2" pvc so an adaptor may be needed. 10 - 20 gpm is recommended.



8. After the plumbing is in place and the 3rd light set use cap rock #5 to hide the pipe. If possible run waterfall before securing the cap.



9. Use additional adhesive to fill gaps. A small cast piece is provided to hide the plumbing in the back.